



- Ball Valve ■ Butterfly ■ Gate/Globe Valve
- Stainer ■ Nrv valve ■ Pharma Valve



An ISO 9001-2015 company

Zodex Valves Automation


Manual Liver/ Operated Ball Valve

Model : ZMBV
 Seat : PTFE
 Size Range : 1/2" to 4"
 Ball Valve : 1 Pcs. / 3 Pcs. Design
 MOC : CF8 / CF8M / WCB / CI
 Ends : Screwed / Socket Weld



Manual Liver/Gear Operated Ball Valve

Model : ZMBV
 SEAT : PTFE
 Size Range : 1/2" to 8"
 Ball Valve : 2 Pcs / 3 Pcs. Design
 MOC : CF8 / CF8M / WCB / CI
 Ends : Flanged / ASA150# / 300#

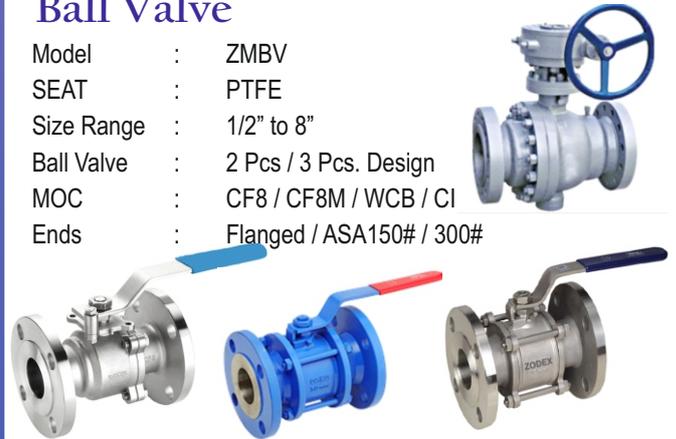

Manual Liver/Gear Operated Butterfly Valve

Model : ZBFV
 Size Range : 1.1/2" to 24"
 Valve Body : CI / CF8/CF8M/Aluminum
 Disc : CF8 / CF8M
 Seat : EPDM / PTFE
 Press. : PN 10 / PN 16 (Max.)



Manual Liver/Gear Operated Butterfly Valve

Model : ZPBFV
 Size Range : 1.1/2" to 12"
 Valve Body : CI / WCB / CF8/ CF8M
 Disc : SG IRON/ CF8 / CF8M
 Seat : PTFE / PFA / FEP
 Press. : PN 10 / PN 16 (Max.)




Manual Wheel / Gear Operated GATE Valve

Model : ZGV
 Size Range : 1/2" to 24"
 Gate / Globe : 150# / 300# / 600# / 800#
 MOC : CF8 / CF8M / WCB / CI
 Ends : Screwed / Flanged / Socket Weld



Manual Wheel / Pneumatic Cylinder Opp Knife Edge Gate Valve

Model : ZKGV
 Size Range : 1.1/2" to 24"
 Gate : 150#
 MOC : CF8 / CF8M / WCB / CI
 Ends : Sandwich type

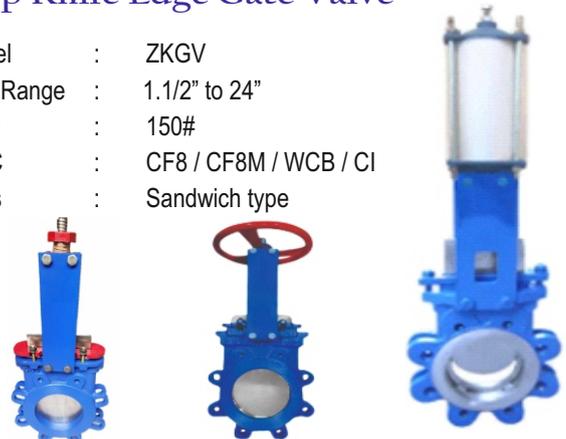

Manual Swing type / Wefar Type NRV Valve

Model : ZNRV
 Size Range : 1" to 24"
 CLASS : 150# / 300# / 600#
 MOC : CI / WCB / CF8 / CF8M
 Ends : Wefar End / Flanged / Socket



Manual Y / T / Basket Type STAINER Valve

Model : ZSV
 Size Range : 1" to 24"
 CLASS : 150# / 300#
 MOC : CI / MS / WCB / CF8 / CF8M
 Ends : Screwed / Flanged




Manual Liver Operated Pharma valve

Model : ZPV
 Actuator : LIVER OPP.
 Size Range : 1/2" to 4"
 Type Valve : Liver
 MOC : SS 304 / SS 316
 Ends : Screwed / TC End



Pneumatic / Electric Actuator Operated Pharma valve

Model : ZPV
 Actuator : Pneumatic / Electric
 Size Range : 2" to 12"
 Type Valve : Liver / pneumatic actuator
 MOC : SS 304 / 316
 Ends : Sandwich type

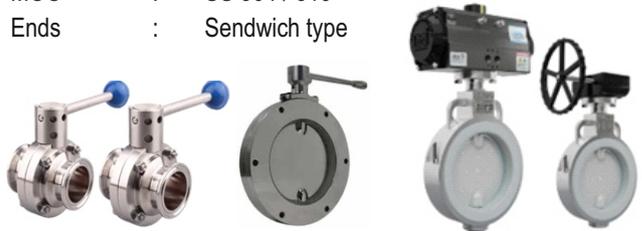

Manual Side Glass Valve

Model : ZSGV
 Size Range : 1/2" to 12"
 GLASS LENGTH : 100MM / 150MM
 MOC : MS / CF8 / CF8M
 Ends : Flanged / TC End



Manual liver / Gear Operated PP Valve

Model : ZPPV
 Size Range : 1/2" to 8"
 MOC : PP / HDPE
 Ends : Screwed / Flanged /



Pneumatic Actuator

Model : ZDSA
 Body : Aluminium Hard Anodize
 Size : 32 To 400
 Operating Pre. : 1 To 8 KG
 Sealing : Nitrile
 Oper. Temp. Range : -20°C to 120°C
 Operation : Air to Open / Air to Close



Electricals Actuator

Model : ZEA
 Body : Aluminium Alloy
 Type : ON / OF 1.1/2" to 4"
 TEMPERATURE : -20°C TO 80°C
 VOLTAGE : 24V DC, 110V AC, 220V AC
 380V (THREE PHASE)



Pneumatic / Electric Actuator Operated ball valve

Model : ZPBV
 Actuator : Pneumatic / Electric
 Size Range : 1/2" to 8"
 Ball Valve : 3 Pcs. Design
 MOC : CF8 / CF8M / WCB
 Ends : Screwed / Flanged / Socket Weld



Pneumatic / Electric Actuator Operated 3 way ball valve

Model : Z3BV
 Actuator : Pneumatic / Electric
 Size Range : 1/2" to 6"
 Port : L Port / T Port
 MOC : WCB / CF8 / CF8M
 Ends : Screwed / Flanged / Socket Weld



Pneumatic / Electric Actuator Operated Butterfly valve

Model : ZTBFV
 Actuator : Pneumatic / Electric
 Size Range : 1.1/2" to 24"
 Valve Body : CI / WCB / CF8 / CF8M
 Disc : SG Iron / CF8 / CF8M
 Seat : Nitrile / EPDM / Silicon
 Press. : PN 16 (Max.)
 Oper. Temp. Range : -20°C to 120°C



Pneumatic / Electric Actuator Operated OFFSET Disc Butterfly valve

Model : ZSDV
 Actuator : Pneumatic / Electric
 Size Range : 1.1/2" to 12"
 Valve Body : WCB / CF8 / CF8M
 Disc : CF8 / CF8M
 Seat : PTFE
 Press. : ANSI 150#
 Oper. Temp. Range : -20°C to 180°C



Pneumatic / Electric actuator operated Alluminium Body Butterfly valve

Model : ZABFV
 Actuator : Pneumatic / Electric
 Size Range : 1.1/2" to 12"
 Valve Body : Aluminum
 Disc : CF8 / CF8M
 Seat : EPDM
 Press. : PN 10 (Max.)
 Oper. Temp. Range : -20°C to 120°C




Pneumatic Diaphragm operated 2 Way / 3 Way Control Valve

Model : ZCV
 Actuator : Pneumatic
 Size Range : 1.1/2" to 4"
 Valve Body : WCB / CF8 / CF8M
 CLASS. : 150# / 300#
 Oper. Temp. Range : 220°C to 400°C



Pneumatic / Electric actuator operated Pharma valve

Model : ZPV
 Actuator : Pneumatic / Electric
 Size Range : 1.1/2" to 16"
 MOC : SS 304 / SS 316
 Ends : Sandwich type

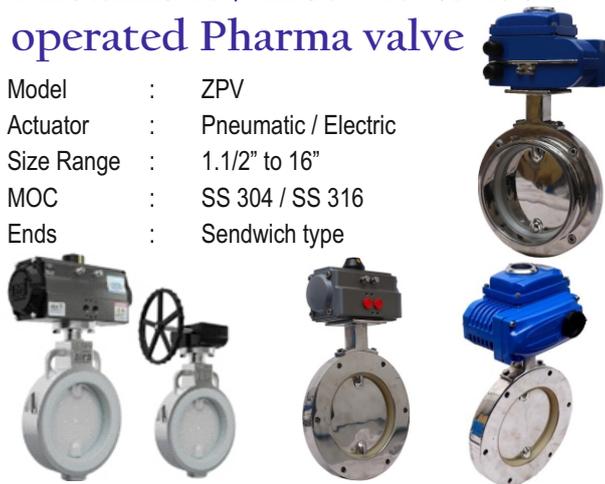

Pneumatic operated Y Type Control Valve

Model : ZYCV
 Actuator : Pneumatic
 Size Range : 1.1/2" to 12"
 Valve Body : CF8 / CF8M
 Seat : PTFE
 End Con. : Screwed / Flange end 150#
 Oper. Temp. Range : -20°C to 180°C



Positioner

Model : ZYT1000
 BODY : ALUMINIUM
 INPUT SIGNAL : 4-20mA DC
 SUPPLY PRE. : 1.4-7kg/cm2(20-100psi)



Micro Limit Switch

Model : ZAPL3N
 ENCLOSURE : WEATHER PROOF IP 67
 CABLE ENTRIES : TWO NPT 1/2"
 TERMINAL STRIPS : 8 POINTS (0.08-2.5m)
 SWICHES. : MECHANICAL SWITCH X 2
 PROXIMITY SENSOR X 2




PNEUMATIC AND ELECTRICAL ACTUATOR OPERATED VALVES



ALL TYPE PNEUMATIC PRODUCT



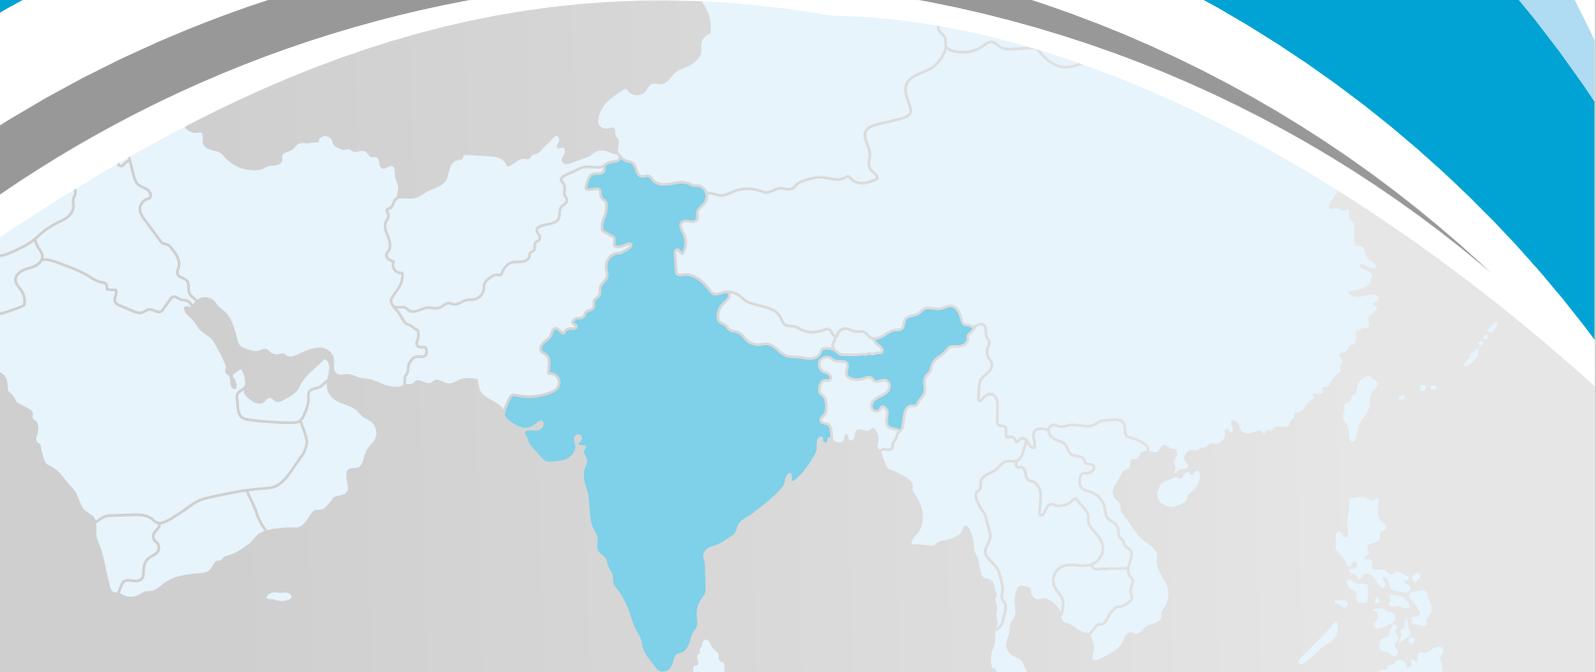

Applications : Suitable for water, steam, gas, air, thermal oil in all industries areas including textile, cement, petrochemical, oil & gas, pulp and paper, steel industries, pharmaceutical, power plant, food & beverages, waste water treatment plants, automobiles and many more.



An ISO 9001-2015 company

Mfg. & Supplier By :

Zodex Valves Automation

Add. FF - 5, Magnum Plaza. B/h. Pratham Upvan, Sunpharma Road, Tandalja Vadodara, 390012

E-mail Id. :- info@zodexvalves.com zodexvalves@gmail.com Website : www.zodexvalves.com

Mob : 7818003666 / 9978601401